




Qualified performance in an extra small SPRx shipper

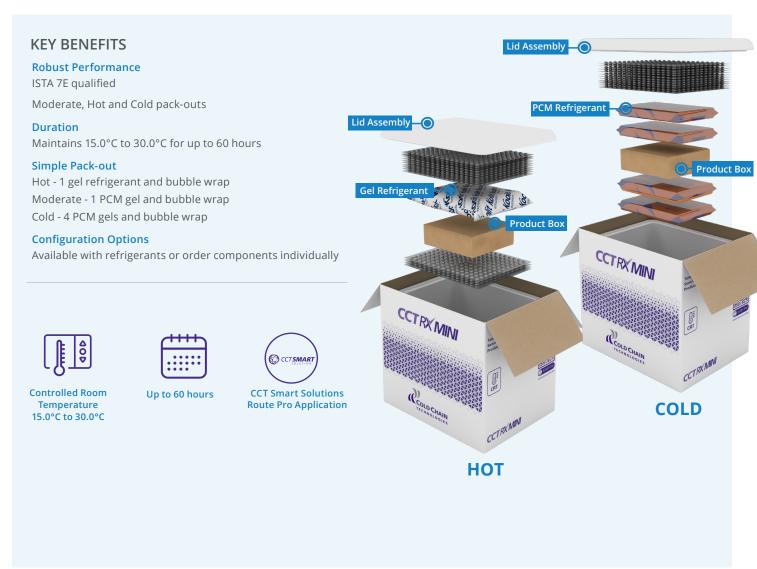

CONFIGURATION OPTIONS AVAILABLE

Bundle (RXM-60-XS-CRT-CISU-BD)

Insulated shipper is in outer corrugate.

Refrigerants ordered separately.

612 gel packs for Hot Profile

107914 17C PCM for Cold and Mod Profile

Pallet (RXM-60-XS-CRT-HOT-PT) (PT - for hot profile only)

Insulated shipper is in outer corrugate.

Refrigerant cases included.

CCT RX MINI

CONTROLLED ROOM TEMPERATURE 15.0°C TO 30.0°C								
Temperature Profile	Duration (hr)	Dimension Type	Approximate Dimensions			Payload	Tare Weight lbs	Volumetric Weight
			Length	Width	Height	Volume	(kg)	lbs (kg)
нот	60	Payload	2.5" in (64 mm)	1.5" in (38 mm)	3" in (76 mm)	.2 L	1.4 lbs (0.64 kg)	5 lbs (2.3 kg)
		Outside	9.75" in (248 mm)	8.13" in (206 mm)	9" in (229 mm)			
MOD	60	Payload	5.25" in (133 mm)	3.75" in (95 mm)	1.25" in (32 mm)	.4 L	1.7 lbs (0.77 kg)	5 lbs (2.3 kg)
		Outside	9.75" in (248 mm)	8.13" in (206 mm)	9" in (229 mm)			
COLD	40	Payload	5.25" in (133 mm)	3.75" in (95 mm)	1.25" in (32 mm)	.4 L	2.72 lbs (1.23 kg)	5 lbs (2.3 kg)
		Outside	9.75" in (248 mm)	8.13" in (206 mm)	9 in (229 mm)			





ColdChainTech.com



Global Headquarters

Cold Chain Technologies Franklin, MA

info Carldahaintanh ann

Panama & South America

Cold Chain Technologies de Panama Sao Paulo, Brazil

cct-latam@coldchaintech.com

Europe, Middle East, & Africa

Cold Chain Technologies B.V. The Netherlands

emea@coldchaintech.com

Singapore & Asia Pacific

Cold Chain Technologies Asia Pte. Ltd. Singapore

apac@coldchaintech.com