PRODUCT FACT SHEET

CT RX" NATURALS

SINGLE USE SUSTAINABLE PARCEL SOLUTION



CCT's Rx Naturals are OCC-E certified to confirm repulpability and recyclability. Our products are able to be given a second life and be reintroduced to the supply chain.

KEY BENEFITS

Curbside Recyclable

100% curbside recyclable

Robust Performance

ISTA 7E qualified for RFG and CRT

Moderate, Hot and Cold pack-outs

*36-hour duration

Sizes

Available in small, medium and large

Rapidly Renewable

Natural, non-petroleum-based materials that have harvest cycles under 10 years

Certified Repulpable

Shippers can be converted again to pulp fiber and used to make paper products

ENVIRONMENTAL IMPACT

Made from Recycled Materials

Curbside Recyclable & Repulpable

Decrease in water consumption, fossil fuel and GHG emissions



Controlled Room Temperature 15.0°C to 25.0°C 10.0°C to 25.0°C



+36 Hours




Refrigerated 2.0°C to 8.0°C



Seasonal Pack-Out Three sizes: 2 L to 8 L



CCT Smart Solutions Route Pro Application

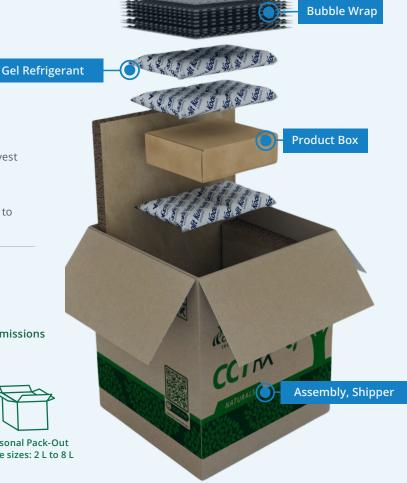

CONFIGURATIONS AVAILABLE

CISU-BD (Bundle)

Insulated shippers in outer corrugate shipped on a pallet. Refrigerant cases are not included.

PT (Pallet)

Insulated shippers in outer corrugate shipped on a pallet. Refrigerant cases are included.

^{*}Please refer to next 2 pages for specific durations

CCT RX NATURALS

CONTROL	LED ROOM	/I TEMPERATI	JRE - HOT					15.0°C to 25.0°
Model	Duration (hr)	Dimension	Approximate Dimensions			Payload	Tare	Volumetric
Number		Type	Length	Width	Height	Volume	Weight lbs (kg)	Weight lbs (kg)
RXN-36-SM-XX	36+	Payload	7.5" in (191 mm)	5.5" in (140 mm)	2.5" in (64 mm)	1.7 L	9.6 lbs (4.4 kg)	10 lbs (4.5 kg)
		Outside	12.38" in (314 mm)	10.38" in (263 mm)	11.75" in (275 mm)			
RXN-36-MD-XX	36+	Payload	7.5" in (191 mm)	7.5" in (191 mm)	5.25" in (133 mm)	4.8 L	13 lbs (5.9 kg)	15 lbs (6.8 kg)
		Outside	12.38" in (314 mm)	12.38" in (314 mm)	14.75" in (375 mm)			
XN-36-LG-XX	36+	Payload	11.5" in (292 mm)	9.5" in (241 mm)	5.25" in (133 mm)	9.3 L	15.1 lbs (6.8 kg)	22 lbs (10 kg)
XXIV-30-LG-XX	30+	Outside	16.38" in (416 mm)	14.38" in (365 mm)	13.75" in (349 mm)			
CONTROL	LED ROOM	Л TEMPERATI	JRE - MODERA	TE				15.0°C to 25.0°
Model	Duration (hr)	Dimension	Approximate Dimensions			Payload	Tare	Volumetri
Number		Туре	Length	Width	Height	Volume	Weight lbs (kg)	Weight lbs (kg)
RXN-36-SM-XX	36+	Payload	7.5" in (191 mm)	5.5" in (140 mm)	4.5" in (114 mm)	3.1 L	5.8 lbs (3.8 kg)	10 lbs (4.5 kg)
		Outside	12.38" in (314 mm)	10.38" in (263 mm)	11.75" in (275 mm)			
RXN-36-MD-XX	36+	Payload	7.5" in (191 mm)	7.5" in (191 mm)	7.5" in (191 mm)	6.8 L	9.2 lbs (4.2 kg)	15 lbs (6.8 kg)
INIT SO IIID XX		Outside	12.38" in (314 mm)	12.38" in (314 mm)	14.75" in (375 mm)			
RXN-36-LG-XX	36+	Payload	11.5" in (292 mm)	9.5 in (241 mm)	6.5" in (165 mm)	11.6 L	11.3 lbs (5.1 kg)	22 lbs (10 kg)
		Outside	16.38" in (416 mm)	14.38" in (365 mm)	13.75" in (349 mm)			
■ CONTROL	LED ROOM	И TEMPERATI	JRE - COLD				1	0.0°C to 25.0°C
Model	Duration (hr)		Approximate Dimensions			Davilead	Tare	Valoreatri
Number			Length	Width	Height	Payload Volume	Weight lbs (kg)	Volumetri Weight lbs (l
XN-36-SM-XX	35	Payload	7.5" in (191 mm)	5.5" in (140 mm)	6.5" in (165 mm)	4.4 L	8.3 lbs (3.8 kg)	10 lbs (4.5 kg)
RXN-36-SM-XX		Outside	12.38" in (314mm)	10.38" in (263 mm)	11.75" in (275 mm)			
RXN-36-MD-XX	36+	Payload	7.5" in (191 mm)	7.5 in (191 mm)	5.5" in (138 mm)	5.1 L	10.5 lbs (4.8 kg)	15 lbs (6.8 kg)
		Outside	12.38" in (314 mm)	12.38" in (314 mm)	14.75" in (375 mm)			
VN-36-16-VV	36+	Payload	11.5" in (292 mm)	9.5" in (241 mm)	5.35" in (136 mm)	9.6 L	15 lbs (6.8 kg)	22 lbs
RXN-36-LG-XX		Outside	16.38" in (416 mm)	14.38" in (365 mm)	13.75" in (349 mm)			(10 kg)

CCT RX NATURALS

Model Number	Duration (hr)	Dimension Type	Approximate Dimensions			Payload	Tare	Volumetric
			Length	Width	Height	Volume	Weight lbs (kg)	Weight lbs (kg)
RXN-36-SM-XX	36	Payload	7.5" in (191 mm)	5.5" in (140 mm)	1.5" in (38 mm)	1 L	5.8 lbs (2.6 kg)	10 lbs (4.5 kg)
		Outside	12.38" in (314 mm)	10.38" in (263 mm)	11.75" in (275 mm)			
RXN-36-MD-XX	36	Payload	7.25" in (184 mm)	7.25" in (184 mm)	2" in (51 mm)	1.8 L	8 lbs (3.6 kg)	15 lbs (6.8 kg)
		Outside	12.38" in (314 mm)	12.38" in (314 mm)	14.75" in (375 mm)			
XXN-36-LG-XX	36	Payload	11.5" in (292 mm)	9.5" in (241 mm)	2.75" in (70 mm)	4.8 L	11.3 lbs (5.1 kg)	22 lbs (10 kg)
		Outside	16.38" in (416 mm)	14.38" in (365 mm)	13.75" in (349 mm)			

REFRIGERA	ATED - MC	DDERATE						2.0°C to 8.0°C
Model Number	Duration (hr)	Dimension Type	Ар	Payload	Tare	Volumetric		
			Length	Width	Height	Volume	Weight lbs (kg)	Weight lbs (kg)
RXN-36-SM-XX	36+	Payload	7.5" in (191 mm)	5.5" in (140 mm)	1.25" in (32 mm)	.8 L	5.8 lbs (2.6 kg)	10 lbs
		Outside	12.38" in (314 mm)	10.38" in (263 mm)	11.75" in (275 mm)			(4.5 kg)
RXN-36-MD-XX	36+	Payload	7.25" in (184 mm)	7.25" in (184 mm)	2.5" in (64 mm)	2.3 L	9.2 lbs (4.2 kg)	15 lbs (6.8 kg)
		Outside	12.38" in (314 mm)	12.38" in (314 mm)	14.75" in (375 mm)			
RXN-36-LG-XX	36+	Payload	11.5" in (292 mm)	9.5" in (241 mm)	2.5" in (64 mm)	4.5 L	12.6 lbs (5.7 kg)	22 lbs
		Outside	16.38" in (416 mm)	14.38" in (365 mm)	13.75" in (349 mm)			(10 kg)

REFRIGER	ATED - CO	LD						2.0°C to 8.0°C
Model Number	Duration (hr)	Dimension Type	Approximate Dimensions			Payload	Tare	Volumetric
			Length	Width	Height	Volume	Weight lbs (kg)	Weight lbs (kg)
RXN-36-SM-XX	60	Payload	7.5" in (191 mm)	5.5" in (140 mm)	3" in (76 mm)	2 L	4.6 lbs (2.1 kg)	10 lbs (4.5 kg)
		Outside	12.38" in (314mm)	10.38" in (263 mm)	11.75" in (275 mm)			
RXN-36-MD-XX	60	Payload	7.5" in (191 mm)	7.5" in (191 mm)	5" in (127 mm)	4.6 L	5.5 lbs (2.5 kg)	16 lbs (6.8 kg)
		Outside	12.38" in (314 mm)	12.38" in (314 mm)	14.75" in (375 mm)			
RXN-36-LG-XX	60	Payload	11.5" in (292 mm)	9.5" in (241 mm)	5" in (127 mm)	9.1 L	8.8 lbs (4 kg)	22 lbs (10 kg)
		Outside	16.38" in (416 mm)	14.38" in (365 mm)	13.75" in (349 mm)			



Global Headquarters

Cold Chain Technologies Franklin, MA Panama & South America Cold Chain Technologies de Panama Sao Paulo, Brazil Europe, Middle East, & Africa Cold Chain Technologies B.V. The Netherlands

Singapore & Asia Pacific Cold Chain Technologies Asia Pte. Ltd. Singapore

info@coldchaintech.com

cct-latam@coldchaintech.com

emea@coldchaintech.com

apac@coldchaintech.com