





QUICK SHIP: TWO Milliken


SHIPS WITHIN 3 DAYS





Ships within 3 days.

The Milliken Quick Ship program offers five of our best selling collections in a curated selection of colors, all with a 3-day lead time. Equipped with our innovative WellBAC® cushion backing, these collections provide the best combination of durability and support.

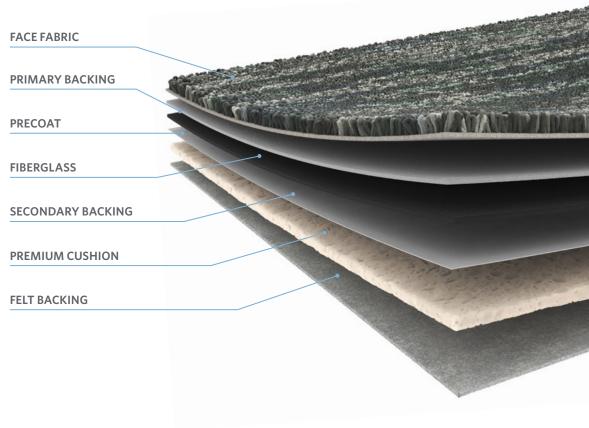

Major Frequency: One







WAVER VBN211-106



OVERTONE VBN211-27-217



FLUX VBN27-152



TREMOR VBN209-118



INTERFERENCE VBN183-118-152



STRIDENT VBN79-152



WAVER DTN211-106



OVERTONE DTN211-27-217



FLUX DTN27-15



TREMOR DTN209-118




INTERFERENCE DTN183-118-152



STRIDENT DTN79-152

VIBRATION

DISTORTION

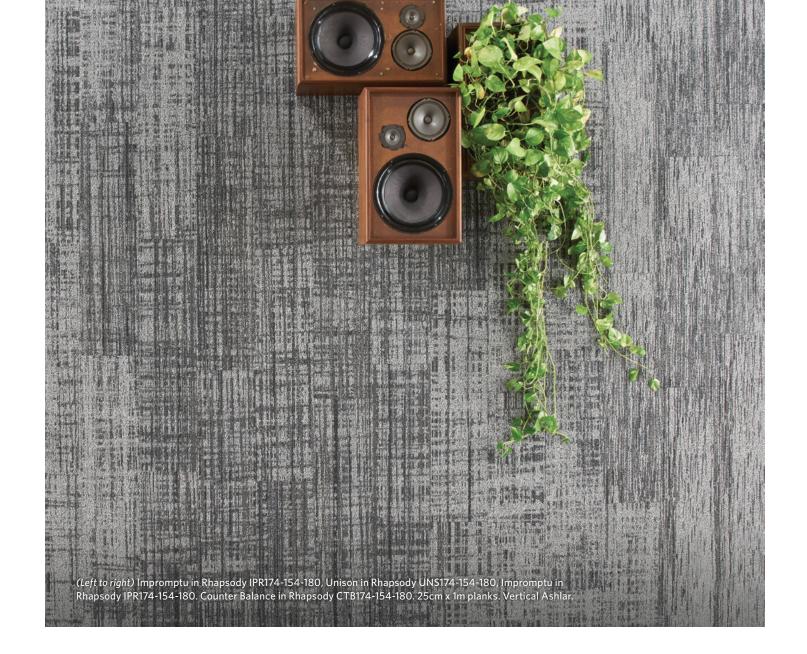

COUNTER BALANCE



RHAPSODY CTB174-154-180



PRODUCTION CTB124-13-144



BOOST CTB161-141-19

IMPROMPTU



RHAPSODY IPR174-154-180



PRODUCTION IPR124-13-144



BOOST IPR161-141-19

Major Frequency: Three



Stereovision





LIGHTWAVE



SPECTRAL LWV153



ELECTROPUNK LWV72-118



VECTOGRAPH LWV118



GEARHEAD LWV27



AIRGLOW LWV13



AUGMENT LWV79



DIMENSIONAL LWV174



HEAD START







VIGILANT HEA235

CONSCIOUS HEA79

SECURE HEA153







SENSIBLE HEA120

AUTHENTIC HEA145

Clean Break



Tracing Landscapes





GEOGRAPHY LESSON

WIND VANE GLN05



MUDDY BOOTS GLN13



TAR GLN154-133



SILVER LAKES GLN139

FIELD STUDY




MUDDY BOOTS FSY13





TAR FSY154-133



WIND VANE FSY05



SILVER LAKES FSY139

MAJOR FREQUENCY: ONE // Vibration, Distortion

Construction

Tufted, Textured Loop

Plank Size

25 cm x 1 m (9.84" x 39.4")

Yarn Type

Universal Fibers® Solution-Dyed Nylon

Stain Resist / Soil Release StainSmart®

Nominal Total Thickness

Vibration: 0.29" (7.4 mm) *Distortion:* 0.31" (7.9 mm)

Standard Backing

PVC-Free WellBAC® **Comfort Cushion** Available with TractionBack

Texture Appearance Retention Rating (TARR)

Severe Traffic End-Use Applications

Recommended Installation Methods

Ashlar, Halfdrop, Random, Herringbone







Field Study: Tufted, Textured Loop Geography Lesson: Tufted, Textured Tip Shear

Tile Size

50 cm x 50 cm (19.7" x 19.7")

Yarn Type

ECONYL® Solution-Dyed Recycled Nylon

Stain Resist / Soil Release StainSmart®

Nominal Total Thickness

Geography Lesson: 0. 320" (8.1 mm) Field Study: 0.320" (8.1 mm)

Standard Backing

TRACING LANDSCAPES // Geography Lesson, Field Study

PVC-Free WellBAC® Comfort Cushion

Texture Appearance Retention Rating (TARR)

Heavy Traffic End-Use Application

Recommended Installation Methods

Monolithic, Horizontal ashlar





MAJOR FREQUENCY: THREE // Counter Balance, Impromptu

Construction

Tufted, Textured Loop

Plank Size

25 cm x 1 m (9.84" x 39.4")

Yarn Type

Universal Fibers® Solution-Dyed Nylon

Stain Resist / Soil Release

StainSmart®

Nominal Total Thickness

Counter Balance: 0.292" (7.4 mm) Impromptu: 0.290" (7.4 mm)

Standard Backing

PVC-Free WellBAC® Comfort Cushion

Texture Appearance Retention Rating (TARR)

Severe Traffic End-Use Applications

Recommended Installation Methods

Ashlar, Halfdrop, Random, Herringbone







STEREOVISION // Lightwave

Construction

Tufted, Textured Loop

Plank Size

25 cm x 1 m (9.84" x 39.4")

Yarn Type

Universal Fibers® Solution-Dyed Nylon

Stain Resist / Soil Release

StainSmart®

Nominal Total Thickness

0.301" (7.65 mm)

Standard Backing

PVC-Free WellBAC® Comfort Cushion

Texture Appearance Retention Rating

Heavy Traffic End-Use Applications

Recommended Installation Methods

Ashlar, Halfdrop, Random, Herringbone







CLEAN BREAK // Head Start

Construction

Tufted, Textured Loop

Tile Size

50 cm x 50 cm (19.7" x 19.7")

Yarn Type

ECONYL® Solution-Dyed Recycled Nylon

Stain Resist / Soil Release

StainSmart®

Nominal Total Thickness

0.33" (8.3 mm)

Standard Backing

PVC-Free WellBAC® Comfort Cushion Available with TractionBack®

Texture Appearance Retention Rating

Heavy Traffic End-Use Applications

Recommended Installation Method Monolithic







EASIEST
QUICK SHIP
PROGRAM
— IN THE —
BUSINESS

















SUSTAINABLE FEATURES

- Certified NSF-140 Gold
- Available with NSF-140 Platinum backing option
- Carry Environmental Product Declarations and Health Product Declarations which contribute to LEED certification
- Carry Declare[™] transparency labels
- Comply with the Red List Imperative

SHOWN ON THE COVER

(Front, Clockwise) Stereovision Light Wave in Gearhead LWV27.
Herringbone. Major Frequency: One Distortion in Tremor DTN209-118.
Vertical Ashlar. Clean Break Head Start in Vigilant HEA235. Monolithic.
Major Frequency: Three Impromptu in Rhapsody IPR174-154-180 and
Counter Balance in Rhapsody CTB174-154-180. Ashlar.

Images in this brochure are approximate for color and pattern scale. Please use actual carpet samples to make your final selections.